

**3G American Standard, Glass Tube, Quick Blow 3.6 × 10 Glass Quick Acting Fuse**

**Functional Characteristics**

Testing current	Blow Time	
	Min	Max
100%	For 4 hours, temp. (ascends/less than 70 )	
200%	/	60 s

**Breaking Capacity**

50 amperes at 125V AC (200mA-6.3A)


50 amperes at 250V AC (200mA-6.3A)

**Material**

Fuse body –glass tube

End cap--nickel plated brass

Pigtail--tin plated copper on nicket plated brass cap

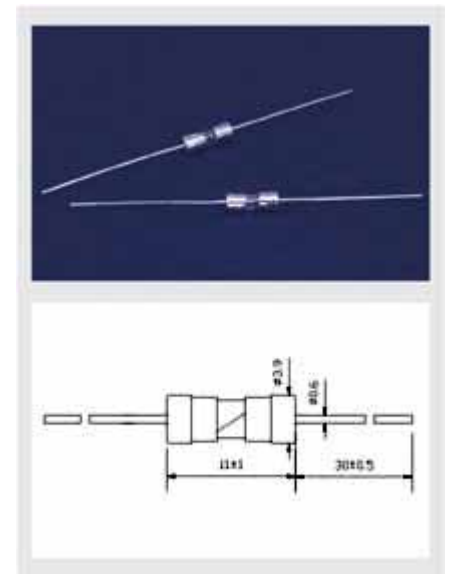

**Approvals**

Current Rating	Voltage Rating	Approvals
200mA	125V/250V	
250mA	125V/250V	
300mA	125V/250V	
350mA	125V/250V	
400mA	125V/250V	
500mA	125V/250V	
750mA	125V/250V	
1A	125V/250V	
1.25A	125V/250V	
1.5A	125V/250V	
2A	125V/250V	
2.5A	125V/250V	
3A	125V/250V	
4A	125V	
5A	125V	
6.3A	125V	

