




XC-5




Suitable fuse: Φ 6.35*32mm


Maximum rated value:30A 250V AC

Casing: plastic

Pole: Silver-plating brass

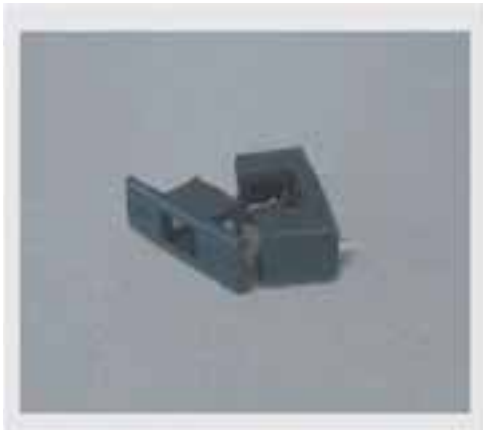

XC-6

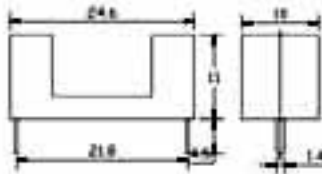

Suitable fuse: Φ 5*20mm


Maximum rated value:6A 250V AC

Holder: High temperature resisting flame-retarded plastic

Clip Pole: Silver-plating brass



XC-7

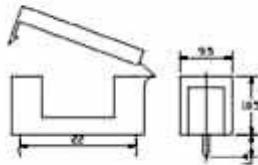

Suitable fuse: Φ 5*20mm


Maximum rated value:6A 250V AC

Holder: High temperature resisting flame-retarded plastic

Clip Pole: Silver-plating brass



XC-8

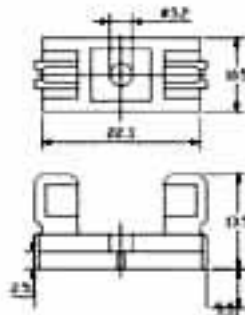

Suitable fuse: Φ 5*20mm


Maximum rated value:6A 250V AC

Holder: Flame-retarded plastic

Clip Pole: Silver-plating brass



XC-9




Suitable fuse: Φ 6.35*32mm


Maximum rated value:6A 250V AC

Holder: Flame-retarded plastic

Clip Pole: Silver-plating brass

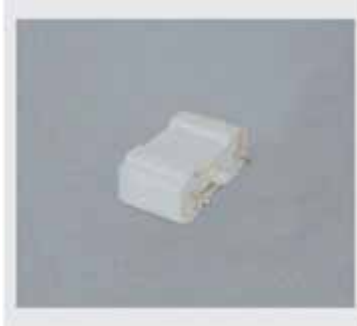

XC-10

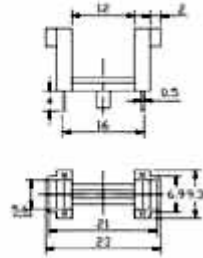

Suitable fuse: Φ 5*20mm


Maximum rated value:6A 250V AC

Holder: High temperature resisting flame-retarded plastic

Clip Pole: Silver-plating brass



XC-11

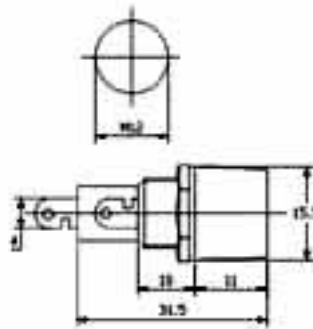

Suitable fuse: Φ 5*20mm


Maximum rated value:6A 250V AC

Casing: plastic

Clip Pole: Silver-plating brass



XC-12

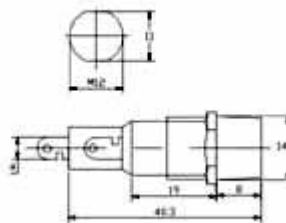

Suitable fuse: Φ 5*20mm

Maximum rated value:6A 250V AC

Casing: plastic

Clip Pole: Silver-plating brass